




SCALE 1"=30'

— = WATER FLOW

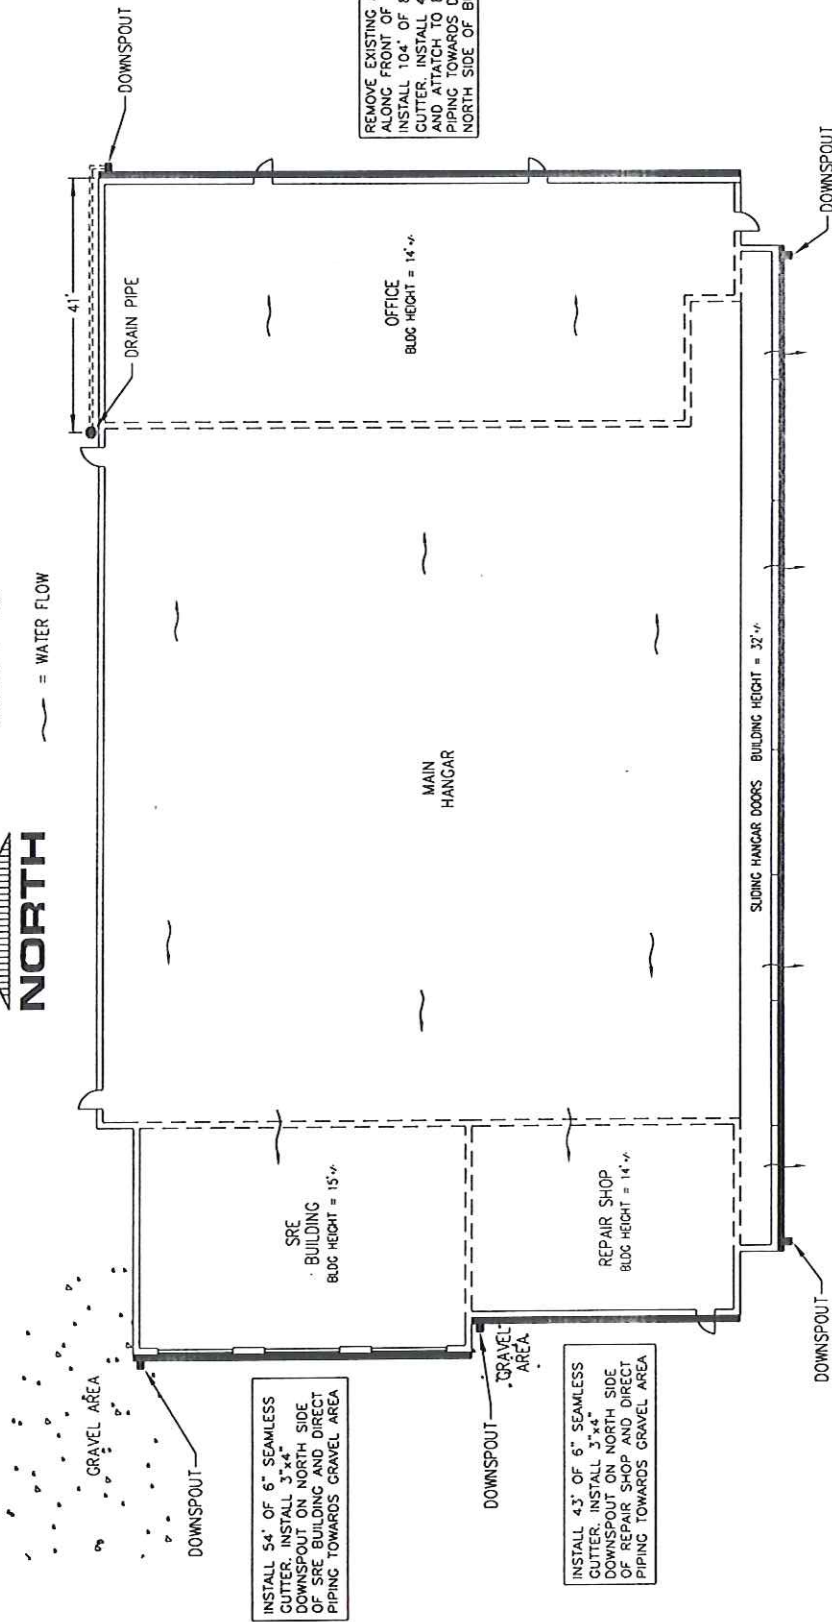

REMOVE EXISTING ALUMINUM SCUPPERS ALONG FRONT OF OFFICE BUILDING. INSTALL 104" OF 8" HEAVY DUTY CUTTER. INSTALL 4"x5" DOWNSPOUT AND ATTACH TO BUILDING; DIRECT PIPING TOWARDS DRAIN PIPE ON NORTH SIDE OF BUILDING.

INSTALL 54' OF 6" SEAMLESS GUTTER. INSTALL 3"x4" DOWNSPOUT ON NORTH SIDE OF SRE BUILDING AND DIRECT PIPING TOWARDS GRAVEL AREA

INSTALL 43' OF 6" SEAMLESS GUTTER. INSTALL 3"x4" DOWNSPOUT ON NORTH SIDE OF REPAIR SHOP AND DIRECT PIPING TOWARDS GRAVEL AREA

PROPOSAL FOR RAIN GUTTER AT CATT COUNTY-OLEAN AIRPORT

Under this proposal the successful bidder shall install seamless gutter and downspouts with all proper fittings along four areas of the main hangar building at the Catt County-Olean Airport. The successful bidder will also be required to install wood fascia boards above the sliding doors of the main hangar.

The contractor shall supply all materials but not limited to: 8" heavy duty gutter, 6" seamless gutter, 3"x4" and 4"x5" downspouts, elbows, end caps, hidden hangers and pipe clips.

The contractor should refer to the sketch above with the following outline for method of construction:

- All gutters shall be made of aluminum and be white in color.
- Gutters shall be laid at a pitch of no less than 1/8" per foot.

CONTRACTOR SHALL FURNISH AND INSTALL 160' OF 6" OR 8" SEAMLESS CUTTER FOR OVERHANG ABOVE HANGAR DOORS. THE CUTTERS SHALL BE DRAINED TO THE LOWER EDGE OF DOORS AT EACH END OF THE HANGAR DOORS BY USING 2"x4" OR 4"x5" DRAINPIPES AND THE NECESSARY CONNECTORS TO COMPLETE THE JOB.

THE SUCCESSFUL BIDDER'S METHOD OF ATTACHMENT FOR THE CUTTER SHALL BE SUBMITTED TO THE ENGINEER FOR APPROVAL BEFORE CONSTRUCTION.